




# NX 910-A

PROFESSIONAL ACTIVE SPEAKER

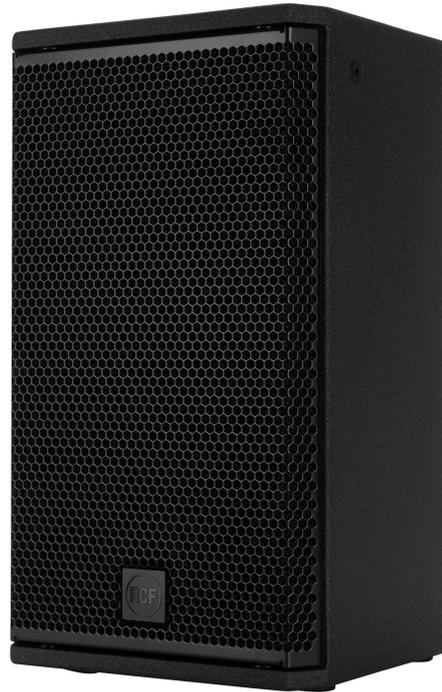

### Description

NX 910-A is masterfully engineered from the ground up to deliver stellar audio performance for solo musicians, bands, and DJs. The combination of 1.75" compression driver, 10" woofer, two-channel 2100W amplifier, and a constant directivity waveguide produces coherent 100° x 60° coverage for the listening area with up to 130 dB SPL of distortion-free sound. Used as a stand-alone speaker for a FOH system, satellite (with subwoofer), stage monitor, or flown speaker, the NX 910-A blends high-performance and reliability in a compact package. Blending RCF proprietary FIRPHASE and Bass Motion Control DSP processing, NX 9 Series speakers are perfectly tuned for each model, delivering absolute clarity and deep, powerful bass response. The tour-ready, rugged all-wood cabinet is easy to carry and secure to install on a pole-, flown-, wall-, or truss-mounted using the dedicated rigging points available.

### Features

- › Up to 130 dB Sound Pressure Level
- › 2100W Class-D Bi-Amplification
- › 50-20000 Hz linear frequency response
- › 1.75" Compression Driver
- › 10" Woofer
- › FIRPHASE zero degrees phase technology
- › Bass Motion Control  
woofer excursion management

### Part Number


13000668 NX 910-A	220-240 V	Black	EAN 8024530019020
13000688 NX 910-A	115 V	Black	EAN 8024530019037



# NX 910-A

PROFESSIONAL ACTIVE SPEAKER

Line Art 2D

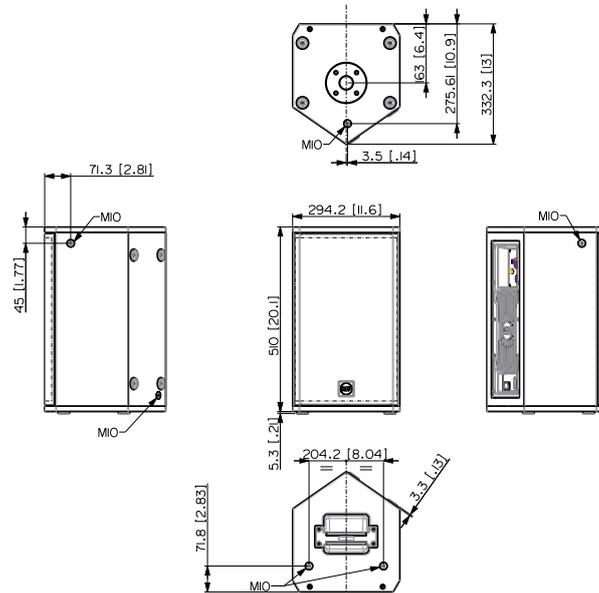

## TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	50 Hz - 20000 Hz
	Max SPL @ 1m	130 dB
	Horizontal coverage angle	100°
	Vertical coverage angle	60°
<b>Transducers</b>	Compression Driver	1 x 1.0", 1.75" v.c
	Woofer	1 x 10", 2.5" v.c
<b>Input/Output section</b>	Input signal	bal/unbal
	Input connectors	XLR, Jack
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
<b>Processor section</b>	Crossover Frequencies	1600 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Linear, Boost, Stage, Volume
<b>Power section</b>	Total Power	2100 W Peak
	High frequencies	700 W Peak
	Low frequencies	1400 W Peak
	Cooling	Convection
	Connections	VDE
	<b>Standard compliance</b>	Safety agency



# NX 910-A

## PROFESSIONAL ACTIVE SPEAKER

Physical specifications	Cabinet/Case Material	Plywood			
	Hardware	2 x M10 Top, 1 x M10 each side, 1 x M10 bottom, 1 x M10 rear			
	Handles	1 Top			
	Pole mount/Cap	35 mm insert			
	Grille	Steel			
	Color	Black			
	Size / Weight	Height	510 mm / 20.08 inches		
Width		295 mm / 11.61 inches			
Depth		333 mm / 13.11 inches			
Weight		16.4 kg / 36.16 lbs			
Rigging / Mounting	<b>ACCESSORIES</b>				
	<b>FLOOR STANDS</b>				
	13360109	AC PRO-FS	Black	EAN 8024530006471	
	<b>FLYING BRACKETS</b>				
	13360031	AC EB 4X		EAN 8024530018870	
	<b>HORIZONTAL BRACKETS</b>				
	13360506	2X PLATE H-BR NX 910-912-915	Black	EAN 8024530020057	
	13360551	H-BR 007	Black - RAL 9005	EAN 8024530021641	
	13360702	PLT60702	Black	EAN 8024530023089	
	<b>POLE MOUNT KITS</b>				
	13360232	AC PMX		EAN 8024530010058	
	13360110	AC PRO-PM	Black	EAN 8024530006488	
	13360067	PM-KIT M20	Black	EAN 8024530014599	
	<b>WALL MOUNT BRACKETS</b>				
	13360539	WM-BR 001	Black - RAL 9005	EAN 8024530021344	
	Protections	<b>BAGS, COVERS</b>			
		13360495	CVR NX 910	Black	EAN 8024530019488
Cables	<b>CABLES KIT</b>				
	13360102	AC XLR 3M3F		EAN 8024530006402	